


TR4S

4U 8-14 Slot/ATX Rackmount Enclosure

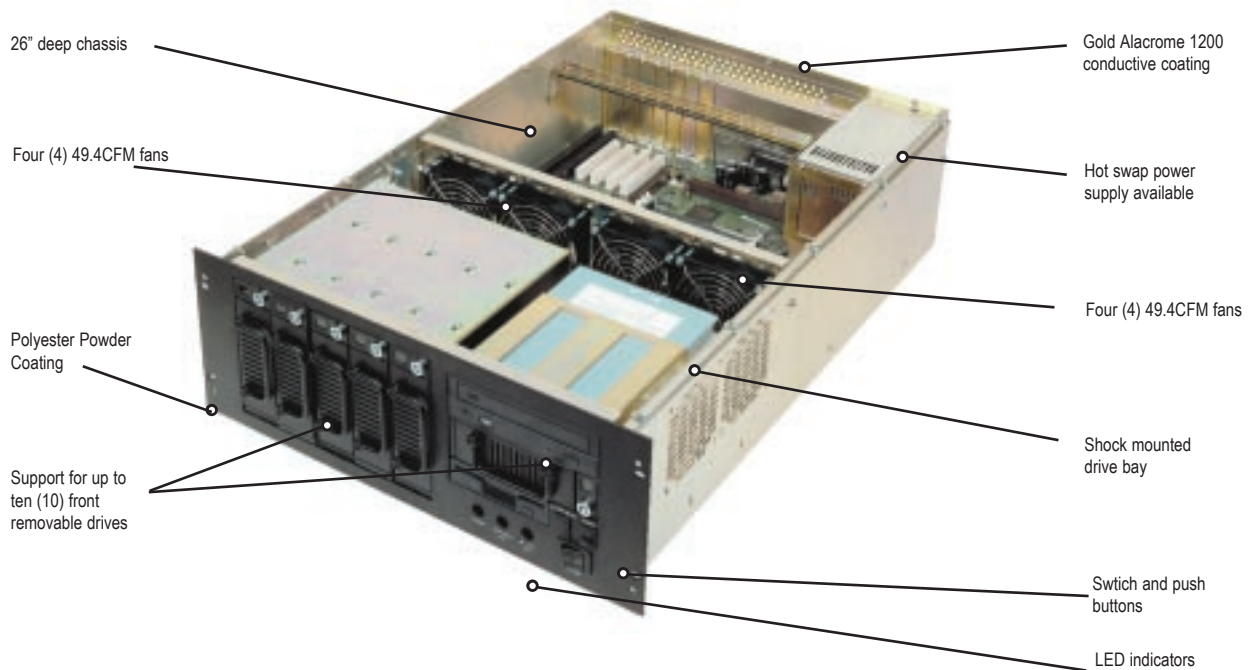

Ordering Information

- TR4S-26A1**
4U Rackmount
front accessible drive 26" chassis
- TR4SD-26A2**
4U Rackmount with locking drive bay door

- Rack Slide Options**
- SL2-28**
28" rack slides, ball bearing

- Power Supply Options**
- PSU2395**
Single 400W AC power-supply, PFC
 - PSU2396**
Single 400W ATX AC power-supply, PFC
 - PSU2397**
Dual mini-redundant 300W ATX AC power-supply, PFC
 - Optional DC Power Supply (Call)**

- Backplane Options**
- PBP-08P4**
 - PBP-08A7**
 - PBP-14P4**
 - PBP-14A7A**
 - PBP-14AC**
 - PBP-13D4**

Single Board Computers/ATX Motherboards
See available models on the web site or call us.

Peripherals & accessories
Call us to get a quote for a fully integrated

Specifications

- Dimensions**
- 4U height
 - 7"(H) x 17"(W)x 26"(D)
178mm(H) x 432mm(W) x 663mm(D)

- Standard Colour Options**
- Black, cream and grey

- Backplanes**
- 8 Slot ISA /PCI
 - 14 Slot ISA /PCI
- or Motherboard**
- ATX form factor motherboard

- Drive Bays**
- Shock mounted drive bays
 - Seven (7) 5.25" and one (1) 3.5" drives (TR4S-26A1)
 - Six (6) 5.25" and two (2) 3.5" drives (TR4SD-26A1)

- Rear Panel**
- AC inputs for power supplies

- Cooling**
- Four (4) 49.4CFM fans

- Front Panel Controls**
- Alarm reset button
 - Reset button
 - On/Off switch
 - 3 activity LEDs

Power Supplies

- PSU2395**
- Single 400W PSU(AC, 90-132/180-264Vac)
(+5V@ 50A) (+12V@ 27A)
(-5V@ 1A) (-12V@ 3A)
- PSU2396**
- Single 400W PSU(AC, 90-132/180-264Vac)
(+5V@ 50A) (+12V@ 27A)
(-5V@ 1A) (-12V@ 3A) (+3.3V@ 30A)
- PSU2397**
- Dual mini-redundant 300W ATX PSU 90-132/180-264Vac
(+5V@ 30A) (+12V@ 13A)
(-5V@ 1A) (-12V@ 1A) (+3.3V@ 22A)
 - DC Power supply optional (Call)

- Operating Environment**
- Temperature: 0 to 50° C

- CE Approval**
- EN 55022 Class A
 - EN 50082-1
 - EN 60950



Rear view - TR4S ATX hot swap version



Back panel options for 4U chassis includes 14 slots



TR4SD shows locking drive bay door

