


TT20 Tower

Industrial 8-14 Slot/ATX Tower Enclosure

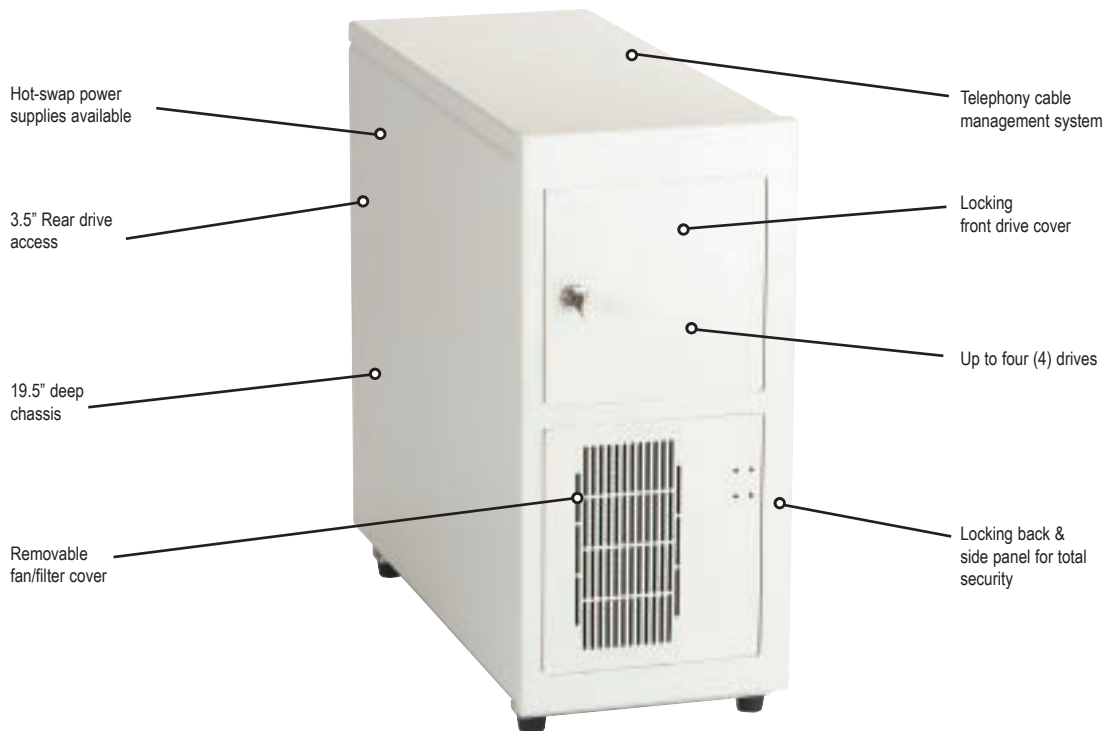

Ordering Information

- TT-20A1-BLO-014
Tower Enclosure, blonde, 14-slot
- TT-20A1-BLO-008
Tower Enclosure, blonde, 8-slot
- TT-20A1-BLO-A07
Tower Enclosure, blonde, ATX version

Power Supply Options

- PSU2395
Single 400W AC power-supply, PFC
- PSU2396
Single 400W ATX AC power-supply, PFC
- DC option
Call



TT20 Tower - rear view
Shows rear mounted floppy disk drive

Specifications

Dimensions

- 17.5"(H) x 8.5"(W) x 19.5"(D)
- 445mm(H) x 216mm(W) x 495mm(D)

Standard Colour Options

- Black, cream and grey

Backplanes

- 8 Slot ISA /PCI
- 14 Slot ISA /PCI

or Motherboard

- ATX form factor motherboard

Drive Bays

- Locking drive door
- Shock mounted drive bay
- Two (2) 5.25" & three (3) 3.5" drives

Rear Panel

- Locking access door for complete security
- Telephony cable management panel

FAN MTBF

- 70,000 hrs. @ 40° C

Cooling

- Two (2) 49.4CFM fans
- Front accessible & removable fans
- Removable front filter

Front Panel Controls

- ON/OFF switch
- Reset switch

Power Supplies

- PSU2395
 - Single 400W PSU(AC, 90-132/180-264Vac)
 - (+5V@ 50A) (+12V@ 27A)
 - (-5V@ 1A) (-12V@ 3A)
- PSU2396
 - Single 400W PSU(AC, 90-132/180-264Vac)
 - (+5V@ 50A) (+12V@ 27A)
 - (-5V@ 1A) (-12V@ 3A) (+3.3V@ 30A)

- DC option (call)

Operating Environment

- Temperature: 0 to 50° C

CE Approval

- EN 55022 Class B
- EN 50082-2
- EN 60950

